

# HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		




## Specifications

- 1.Current Rating:0.75Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:30 mΩ max.
- 5.Operating Temperature:−40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V−0,Black
- 8.Plated: Au Over Ni

## Ordering Information

L201 XX -XX 0 X XX X

Insulation Height*Wide	NO. of Pins Per Row:	Insulation Material	Contact Plating	Serial NO.	Packing
(H*W)	1-50P	Option:	0=0.8" Gold	01-69	A=PE Bag
		1=BT	1=Au1" Gold		B=Tube
		2=PPS	2=Au1.5" Gold		C=Tray
		3=NV6T	3=Au2" Gold		D=Reel
		4=LCP	4=Au3" Gold		
		5=NV66	5=Au5" Gold		
		6=Customized	6=Customized		
		7=NV46	7=Gold/Tin		
		8=NV9T	8=Tin		

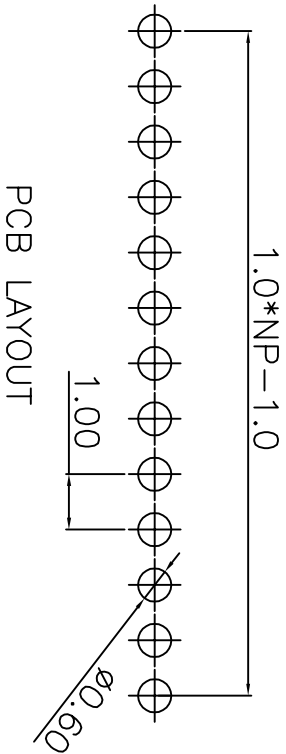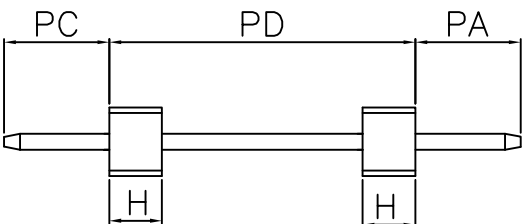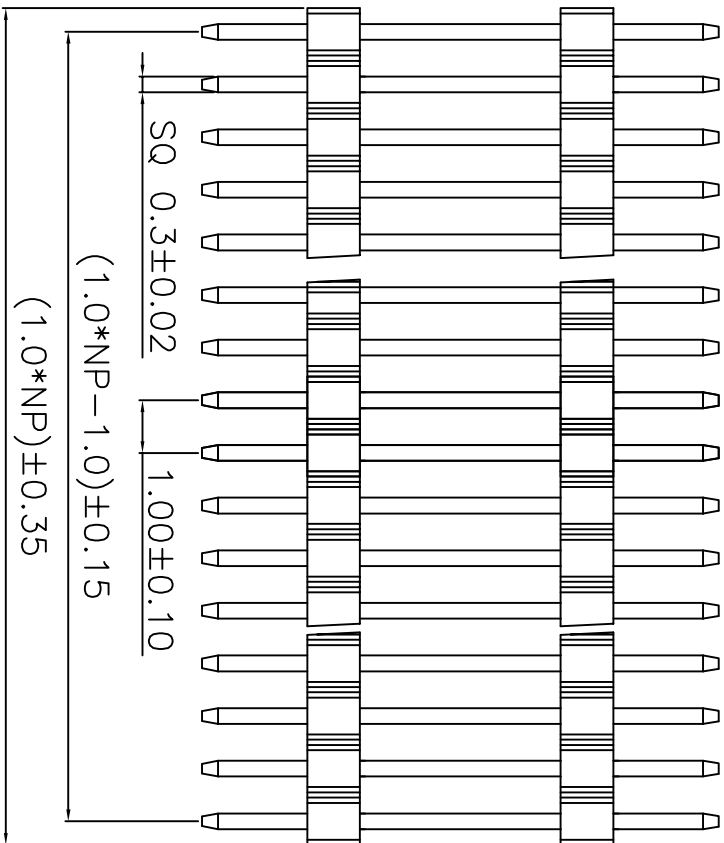

ITEM	PD	PC	PA	H	Pin Length
Standard	9.00	2.00	2.00	1.00	13.0
Alternate					

**LD CONN** 东莞连大精密制品有限公司  
Dongguan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINER	ANGLES
.0 ±0.30	0.°	±3°
.00 ±0.20	.0°	±2°
.000 ±0.10	.00°	±1°

TITLE	PHI. 0mm Pin Header Single Row 180°	DRAWN BY	YTT	16.02.03
PART NO	L20110-XX0XXXXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNITE	mm	PAGE
				1/1
				SIZE
				A4