
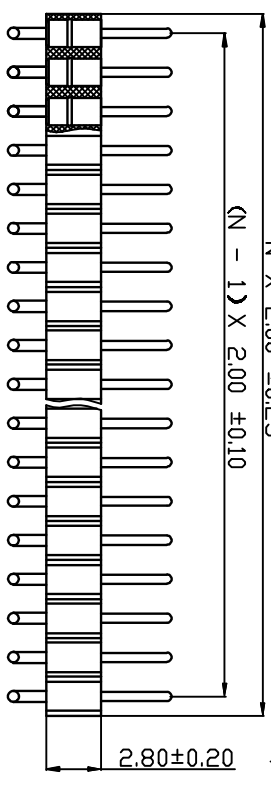
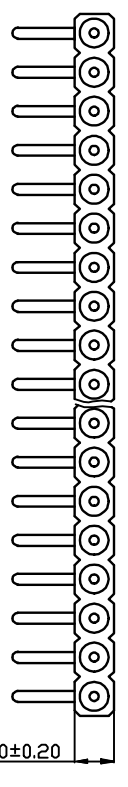
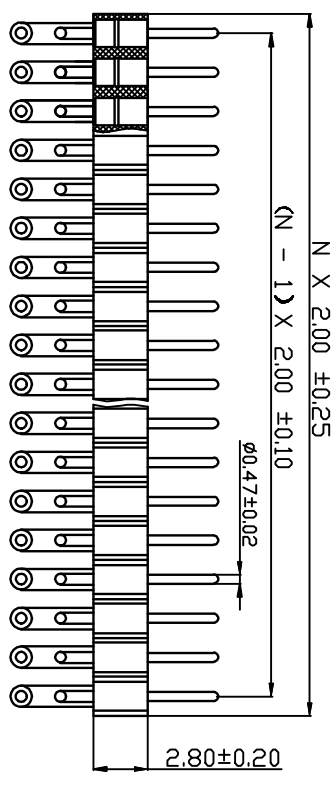



HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

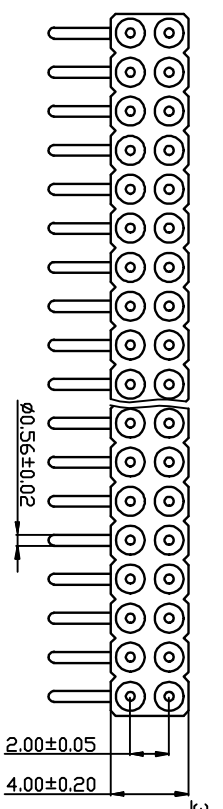

Technical Specs:
 Insulator: Black glass filled polyester
 PPS-GF30-PR
 Flammability: UL 94V-0
 Sleeve: Brass (H59-3)
 Contact clip (4 finger): Beryllium copper (C17200)
 Accepted pln: Ø0.40 to 0.56mm
 Force: (polished steel gauge Ø0.43mm)
 -Insertion: 2 N typ
 -Withdrawal: 1 N typ
 Mechanical life: min 500 cycles
 Rated current: 3A
 Contact resistance: max 10mΩ
 Dielectric resistance: Min 1000V RMS

Ordering Information

L489XX - X X XX X

NO. of Pins
 Per Row: 01-40P
 The connection method
 0=180°
 1=90°
 2=SWT
 Contact Plating
 1=Gold flash
 2=Au/Tin
 Serial NO. 01-99
 Packing
 A=PE Bag
 B=Tube
 C=Tray
 D=Reel

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINER	ANGLES
0 ±0.30	0.°	±3°
.00 ±0.20	.0°	±2°
.000 ±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司		Dongguan Lianda Precision Products Co., LTD	
TITLE	DRAWN BY	Lu Junhui	18.11.12
PART NO	CHECKED BY		
L489X-1XXXX	APPROVED BY		
SCALE 1:1	UNIT mm	PAGE 1/1	SIZE A4