










REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Main technical features:
 Temperature Range: -25 ~ +85 °C
 Rated voltage: 50 V AC, DC
 Rated current: 0.2 A AC, DC
 Contact resistance: ≤0.04 Ω
 Insulation Resistance: ≥500 MΩ
 voltage: 200 V AC / minute
Materials:
 Shell: LCP UL94V-0 black
 Lock: LCP UL94V-0 black
 contact pin: phosphor bronze (tin)
 solder pieces: brass (tin)

Ordering Information

L502XX-X X X XX X
 PIN 1, SMT 2, Pull down Flip ove 3, H=2.0
 A=PE Bag B=Tube C=Tray D=Reel

NO. of Contacts (n)	Dimensions		
	A	B	C
4	3.0	5.1	8.9
5	4.0	6.1	9.9
6	5.0	7.1	10.9
7	6.0	8.1	11.9
8	7.0	9.1	12.9
9	8.0	10.1	13.9
10	9.0	11.1	14.9
11	10.0	12.1	15.9
12	11.0	13.1	16.9
13	12.0	14.1	17.9
14	13.0	15.1	18.9
15	14.0	16.1	19.9
16	15.0	17.1	20.9
17	16.0	18.1	21.9
18	17.0	19.1	22.9
19	18.0	20.1	23.9
20	19.0	21.1	24.9
21	20.0	22.1	25.9
22	21.0	23.1	26.9
23	22.0	24.1	27.9
24	23.0	25.1	28.9
25	24.0	26.1	29.9
26	25.0	27.1	30.9
27	26.0	28.1	31.9
28	27.0	29.1	32.9
29	28.0	30.1	33.9
30	29.0	31.1	34.9

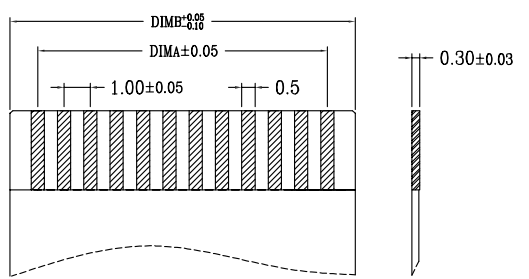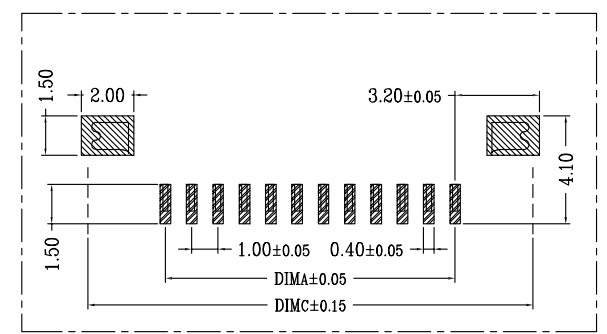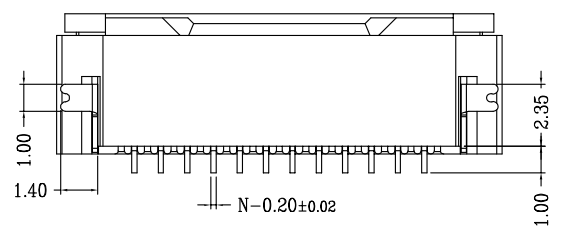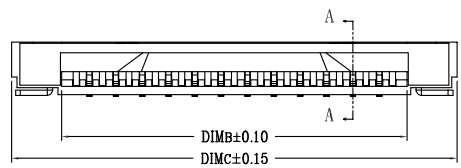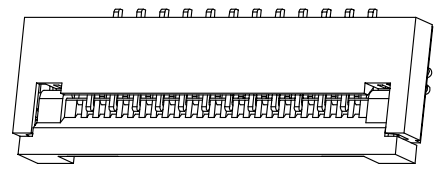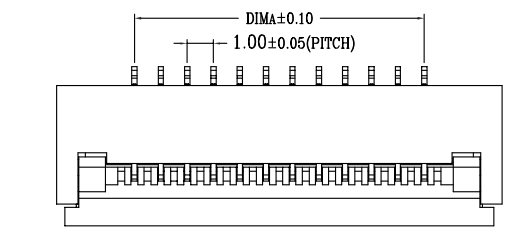

TOLERANCE UNLESS OTHERWISE SPECIFIED			
LINER	ANGLES		
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

东莞连大精密制品有限公司
 DongGuan LianDa Precision Products Co., LTD

TITLE	FPC-W PH1.0 40P H2.0 Pull down Flip ove	DRAWN BY	HRJ	9/4'19
PART NO	L50240-213XXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4