


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW	6/1-'20	HYJ

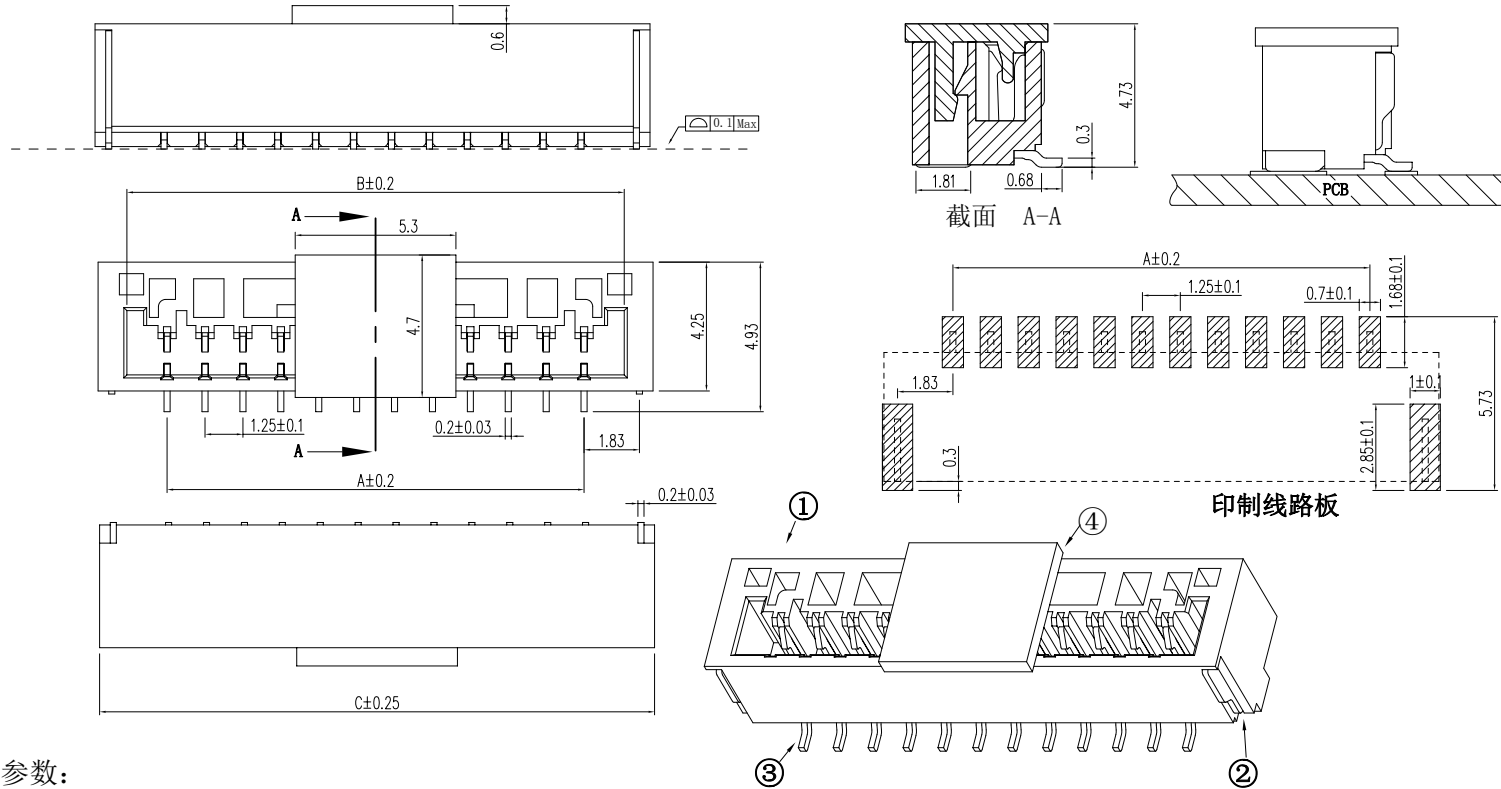

### 1. 技术参数:

- 1.1 额定电流: 1.0A AC/DC
- 1.2 额定电压: 50V
- 1.3 耐电压: 500V ACminute
- 1.4 接触电阻: 20mΩ MAX
- 1.5 绝缘电阻: 500MΩ MIN
- 2. 工作温度: -25℃~+85℃

L1253AWV - \*\* - F1C B 1 - \* - X

PART No. \_\_\_\_\_

No. OF CIRCUITS \_\_\_\_\_  
02~15

PLASTIC MATERIAL \_\_\_\_\_  
F1C=LCP (BEIGE)

SPECIAL CODE: CAP \_\_\_\_\_

PACKAGING \_\_\_\_\_  
R=REEL  
P=PE

Metal code: \_\_\_\_\_  
1=PhosphorBronze

PLATING \_\_\_\_\_  
B=MATTE Sn

NO	物料名称	规格型号	数量(PCS)	材质	镀涂
①	底座	GH	1	LCPE130i	本色
②	焊片	GH	2	磷铜	锡
③	插针	GH	2~20	磷铜	锡
④	盖板	GH	1	LCPE130i	本色

**LDCONN** 东莞连大精密制品有限公司  
DongGuan LianDa Precision Products Co., LTD




Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
2P	1.25	3.85	5.80	12P	13.75	16.35	18.30
3P	2.50	5.10	7.05	13P	15.00	17.60	19.55
4P	3.75	6.35	8.30	14P	16.25	18.85	20.80
5P	5.00	7.60	9.55	15P	17.50	20.10	22.05
6P	6.25	8.85	10.80	16P	18.75	21.35	23.30
7P	7.50	10.10	12.05	17P	20.00	22.60	24.55
8P	8.75	11.35	13.30	18P	21.25	23.85	25.80
9P	10.00	12.60	14.55	19P	22.50	25.10	27.05
10P	11.25	13.85	15.80	20P	23.75	26.35	28.30
11P	12.50	15.10	17.05				

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°


TITLE	WAFER-L PH1.25 1XNP 立贴 GH 带帽	DRAWN BY	HYJ	6/1-'20
PART NO	L1253AWV-**-F1C B1-R-X	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

A4

标记	版本	更正记录	修订人	审核
△				
△				
△				

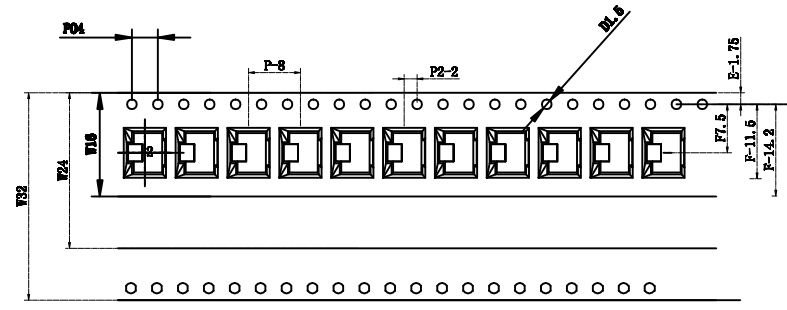

卷装示意图仅供参考

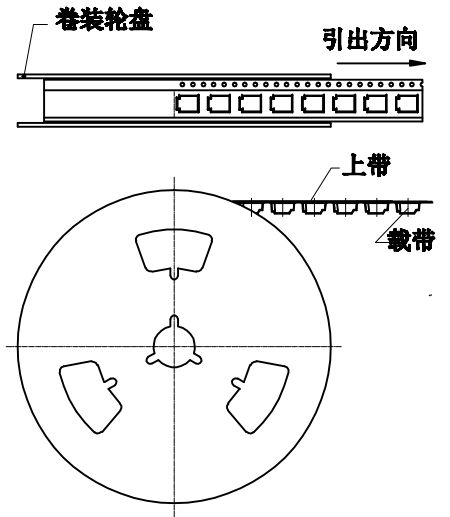


**GH-立贴卧贴系列**

	W	B0	F
2P	16.00±0.30	6.10±0.10	7.50±0.10
3P	16.00±0.30	7.35±0.10	7.50±0.10
4P	16.00±0.30	8.60±0.10	7.50±0.10
5P	24.00±0.30	9.85±0.10	11.5±0.10
6P	24.00±0.30	11.1±0.10	11.5±0.10
7P	24.00±0.30	12.35±0.10	11.5±0.10
8P	24.00±0.30	13.6±0.10	11.5±0.10
9P	24.00±0.30	14.85±0.10	11.5±0.10
10P	24.00±0.30	16.10±0.10	11.5±0.10
11P	32.00±0.30	17.35±0.10	14.2±0.10
12P	32.00±0.30	18.6±0.10	14.2±0.10

尺寸栏	
E	1.75±0.10
F	7.5±0.10
P2	2.00±0.10
∅D	1.50±0.10 0.00
Po	4.00±0.10
W	16.00±0.30
P	8.00±0.10
Ao	5.25±0.10
B0	6.10±0.10
K0	5.05±0.10
t	0.30±0.05

生产参数	
模数	130 模
颗数	1560 颗
卷轮	330mm
包装数	1500 颗

- 说明
- 10个边孔的累计公差不能超过±0.2mm.
  - 材料规格: PS 白色料抗静电, 厚度 0.30mm.
  - 13英寸卷轮卷装长度: 12.48米, 包装零件总颗数: 1560颗, 每盘实包颗数: 1500颗
  - 所有尺寸设计参照 EIA-481-C-2003.
  - 载带在250mm长度内最大弯曲不能超过1mm见上图



东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD		产品型号: GH-立贴卧贴系列	
审核		成品包装图纸	
日期: 2020年5月13日		单位: mm	
		页数: 1/1	比例: 1:1

D  
E

A  
B  
C  
D  
E