




T2004 SERIES 2.00mm pitch Through Hole Reflow Type Connector

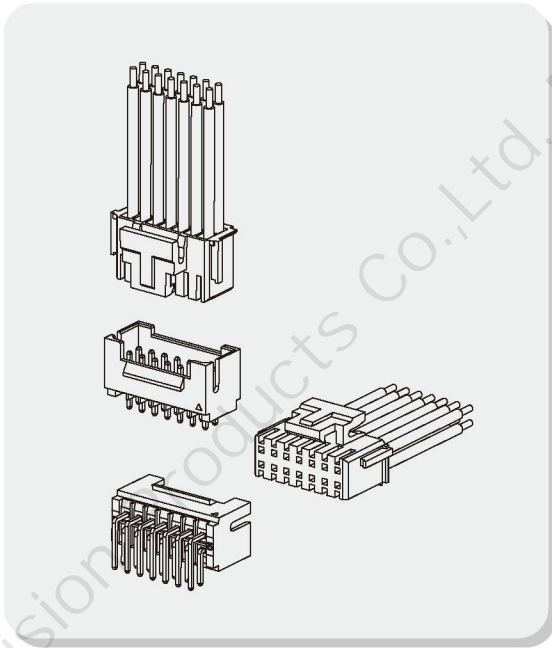

■ Specifications

- Contact resistance: $\leq 30\text{m}\Omega$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Rated voltage: 250V AC DC
- Rated current: 3.0A AC DC
- Withstand voltage: 1000V AC/minute
- Temperature range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

■ Assembly Layout

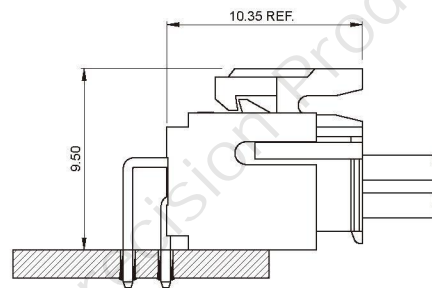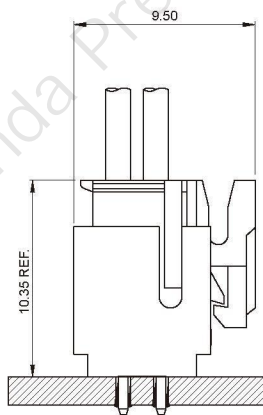

WIRE TO BOARD

BOARD TO BOARD

WIRE TO WIRE

FPC SERIES


THR SERIES

LIGHTING SERIES





OTHER SERIES

T2004 SERIES 2.00mm pitch Through Hole Reflow Type Connector

T2004A (2.00mm pitch 180°Wafer DIP TYPE)




- Reference Information:
- Material: Pin: Brass/Tin-plated
- Wafer: LCP,UL94V-0
- Mates with A2004 series Housing

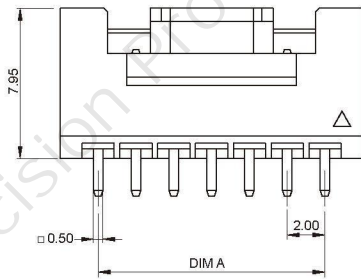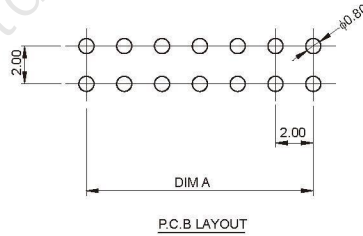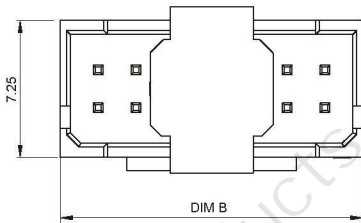





Ordering Information & Dimensions:

Circuit	Dimensions(mm)	
	A	B
2*2	2.00	6.00
2*3	4.00	8.00
2*4	6.00	10.00
2*5	8.00	12.00
2*6	10.00	14.00
2*7	12.00	16.00
2*8	14.00	18.00
2*9	16.00	20.00
2*10	18.00	22.00
2*11	20.00	24.00
2*12	22.00	26.00
2*13	24.00	28.00
2*14	26.00	30.00
2*15	28.00	32.00
2*16	30.00	34.00

T2004AW (2.00mm pitch 90°Wafer DIP TYPE)



- Reference Information:
- Material: Pin: Brass/Tin-plated
- Wafer: LCP,UL94V-0
- Mates with A2004 series Housing

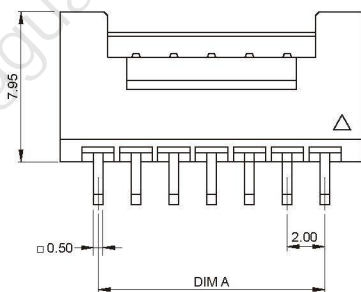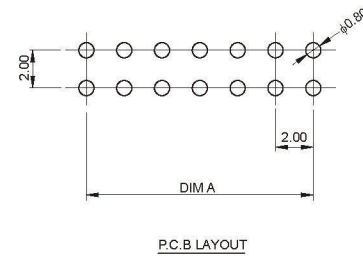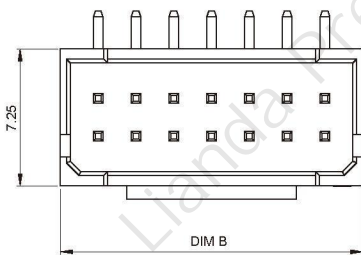

Ordering Information & Dimensions:

Circuit	Dimensions(mm)	
	A	B
2*2	2.00	6.00
2*3	4.00	8.00
2*4	6.00	10.00
2*5	8.00	12.00
2*6	10.00	14.00
2*7	12.00	16.00
2*8	14.00	18.00
2*9	16.00	20.00
2*10	18.00	22.00
2*11	20.00	24.00
2*12	22.00	26.00
2*13	24.00	28.00
2*14	26.00	30.00
2*15	28.00	32.00
2*16	30.00	34.00